




*Since 1985*


# Swing Away Trailer Bottom

***PNEUMATIC OR GRAVITY UNLOADING – EASY CLEAN OUT***

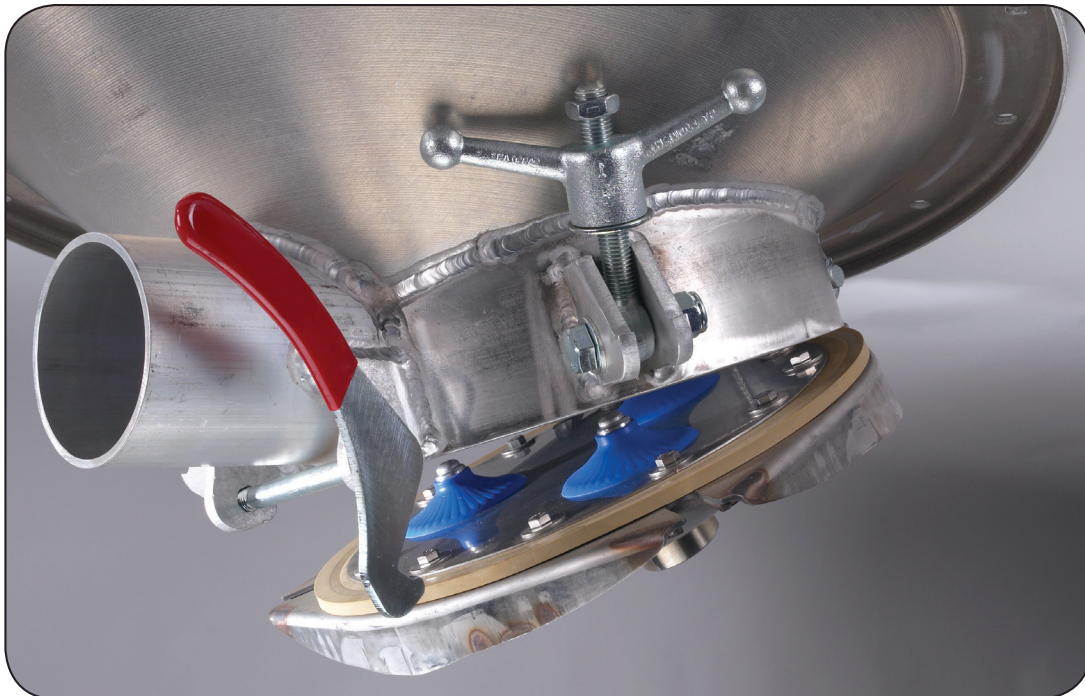

**Pneumatic OR Gravity Unloading**  
**Two Way Hauling of Different Products**  
**Easy Clean Out**  
**5" or 6" Unloading Pipes**  
**Rugged Design for Long Service**  
**Bolt On or Weld On**

**Swing Away Bottoms** offer the best in versatility for customers looking for multipurpose use of their bulk trailer. Swing Away Bottoms permit pneumatic or gravity discharge, allow for easy clean out and washing and can be used for two-way hauling of different products.



**Insist on genuine Solimar  
disks with the trademarked  
Radial Ridge Design.**

**Solimar Pneumatics | Minneapolis, MN 55432 USA | 1.800.233.7109 | P: 763.574.1820**


**F: 763.574.1822 | email: [solimar@solimarpne.com](mailto:solimar@solimarpne.com) | [www.solimarpneumatics.com](http://www.solimarpneumatics.com)**

Solimar, Solimar-USA and the Radial Ridge Design are trademarks of Solimar Pneumatics




Since 1985

# Swing Away Trailer Bottom

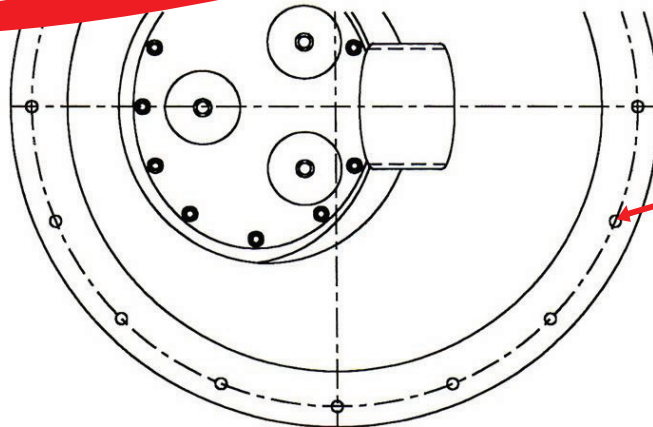


32 - 3/4" (832mm) Bolt Circle  
(16) 5/8" (16 mm)  
Diameter Bolt Hole.

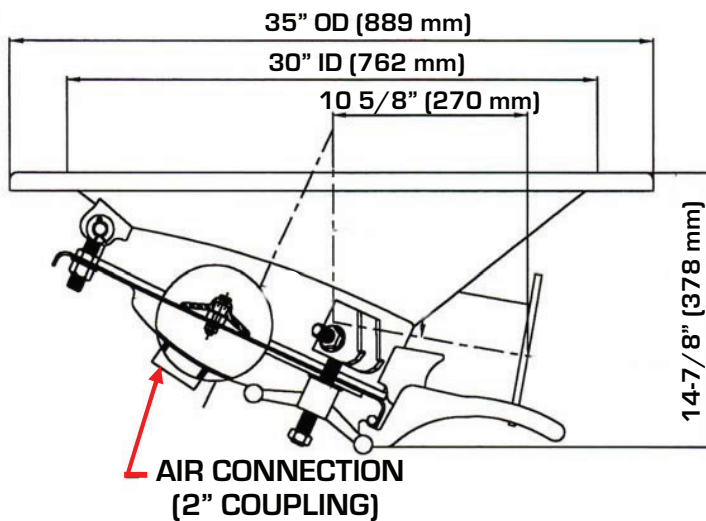


Pneumatically Unload  
Through a 5" (or 6")  
Diameter Discharge

MAX CLEARANCE CLOSED  
(FROM MOUNTING FLANGE)

5" (127 mm) BFV  
FLANGE



MAX CLEARANCE OPEN  
(FROM MOUNTING FLANGE)

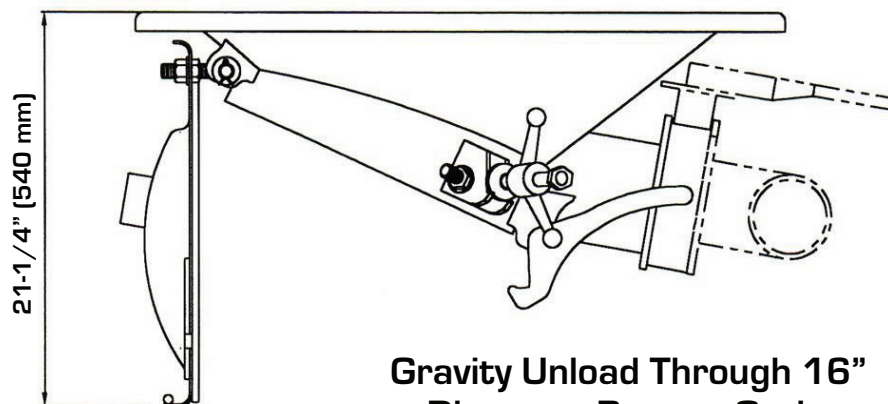

Gravity Unload Through 16"  
Diameter Bottom Outlet